LED COMMERCIAL DOWNLIGHT SERIES

SES-CDL6 SES-CDL8





Technical Specifications

Size:	See Reverse
Watts:	18W 27W 40W
Lumen:	2268lm 3280lm
CCT:	3000K 4000K 5000K
Voltage:	100~277VAC
Dimmable:	Yes
Beam Angle:	52° 47°
CRI:	>80
PF:	×0.9
IP Rate:	IP42
Materials:	Aluminum
Housing Color:	Silver
Lifespan:	50,000 hours






Features

SARIN Energy is proud of its high-quality LED Commercial Downlight Series. This revolutionary product adopts the latest technology, replacing traditional bulbs with energy efficient LEDs. These are widely used in the lighting of homes, hotels, offices and other commercial spaces. These fixtures are suitable for a variety of applications and will provide significant energy savings.



Dimensions & Diagrams

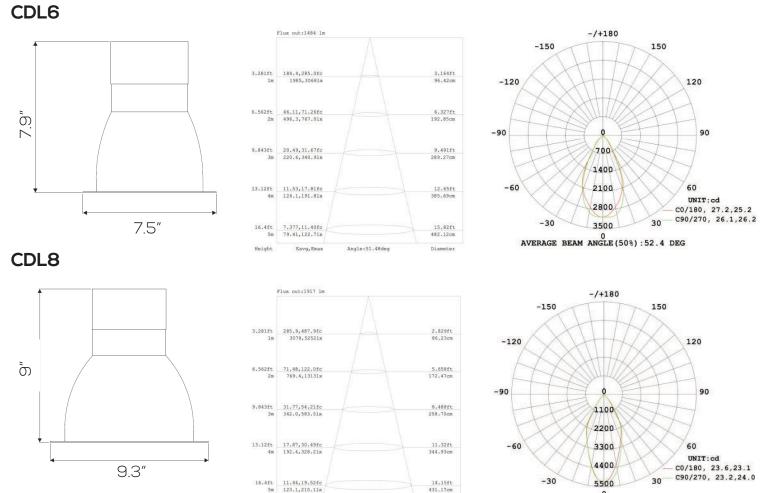

AVERAGE BEAM ANGLE (50%):46.9 DEG

Model Numbers

SES-CDL6-3000-18 SES-CDL6-3000-27 SES-CDL6-3000-40 SES-CDL6-4000-18 SES-CDL6-4000-27 SES-CDL6-4000-40 SES-CDL6-5000-18 SES-CDL6-5000-27 SES-CDL6-5000-40

Eavg, Emax

Angle:46.65deg

SES-CDL8-3000-18 SES-CDL8-3000-27 SES-CDL8-3000-40 SES-CDL8-4000-18 SES-CDL8-4000-27

Diameter

SES-CDL8-4000-40 SES-CDL8-5000-18 SES-CDL8-5000-27 SES-CDL8-5000-40