


FEATURES



- Moisture and dust resistant.
- Smooth and uniform light output void of flicker or humming noise.
- Sleek and modern aesthetics combined with a rugged construction.
- Resistant to vibration and water.
- Inputs voltage range : 100 -277 V, 50-60Hz.
- Made from prime grade aluminum alloy.


PHYSICAL PARAMETERS

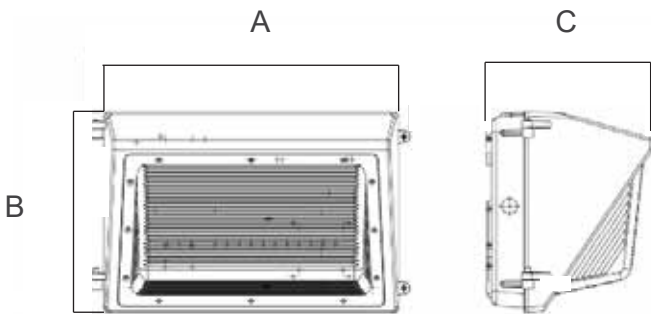

Wattage	A (in)	B (in)	C (in)
48 W - 130 W	14.21	9.25	7.08

DESCRIPTION

The Averlite LED wall pack semi cutoff is one of the most energy efficient lighting options on the market for wall-mounted security and building facades. It offers reduced energy consumption and eliminates the need for frequent bulb and ballast replacements that are commonly found with conventional Wall Packs that contain Metal Halide and High Pressure Sodium bulbs. It is designed to replace traditional Wall Packs up to 400W HID.



ORDERING INFORMATION


SERIES CODE

Model Number	Wattage	CCT Optional	CRI	Efficacy	Diffuser Type
60ID0048WCVRXY	48 W	2700 K - 5700 K	70+	115 lm/W	Clear / Frosted
60ID0060WCVRXY	60 W	2700 K - 5700 K	70+	115 lm/W	Clear / Frosted
60ID0080WCVRXY	80 W	2700 K - 5700 K	70+	115 lm/W	Clear / Frosted
60ID0100WCVRXY	100 W	2700 K - 5700 K	70+	115 lm/W	Clear / Frosted
60ID0130WCVRXY	130 W	2700 K - 5700 K	70+	115 lm/W	Clear / Frosted

FIXTURE DETAILS


Efficacy	115 lm/W				
Wattage	48 W	60 W	80 W	100 W	130 W
Lumen Output	5520 lm	6900 lm	9200 lm	11500 lm	14950 lm
LED Brand and Package	LUMILED / CREE 3030, 1W				
Number of LEDs	56	72	108	144	189
Operating Temperature	-20°F to +140°F				
IP Rating	IP65				
Power Factor	> 0.95				
Heat Sink Type	High Pressure Die Cast Aluminum				
PCB Thickness	1.2mm				

MOUNTING OPTIONS

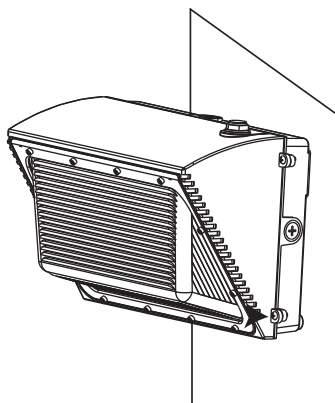


DISTRIBUTION DIAGRAM


48 W

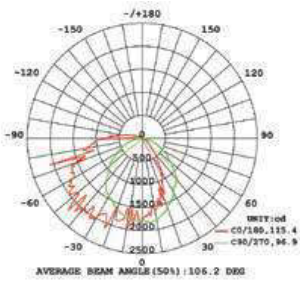


60 W



80 W



100 W



INSTALLATION

A. WALL MOUNT

1. Unscrew the screw to remove the lamp body (Figure 1)
2. Unscrew the cover of the entry hole and remove it. (Figure 2)
3. Connect input and dimming wires with wires from j-box. (Figure3)
4. Use the screws to lock the fixture. (Figure 4)




Figure 1




Figure 2




Figure 3




Figure 4